

P.C.B. LAYOUT  
TOP VIEW ±0.05

PART NUMBER:

MMCKF - 0 8 \* T - 1 2 1

SERIES

NO. OF POS.

CONTACT PLATED OPTION

TAPE REEL PACKAGE

TIN PLATING ON SOLDER TAIL

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD




MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK  
 SHELL: STAINLESS STEEL  
 SOLDER PAD: COPPER ALLOY, TIN PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 80m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -20°C~+85°C

Pin	No.	NAME	TYPE	DESCRIPTION
1	DAT 2	I/O/PP	Date Line(bit2)	
2	CD/DAT 3	I/O/PP	Card Detect/Date Line(bit3)	
3	CMD	PP	Command Response	
4	VDD	S	Supply Voltage	
5	CLK	I	Colck	
6	VSS	S	Supply Voltage Ground	
7	DAT0	I/O/PP	Date Line(bit0)	
8	DAT1	I/O/PP	Date Line(bit1)	

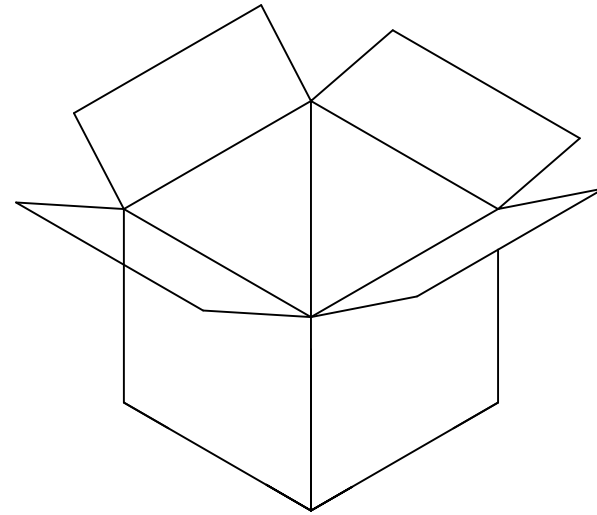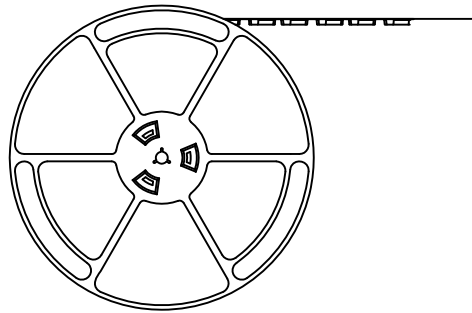

1500PCS/ REEL, 18000PCS/ 12 REEL/ CARTON

