
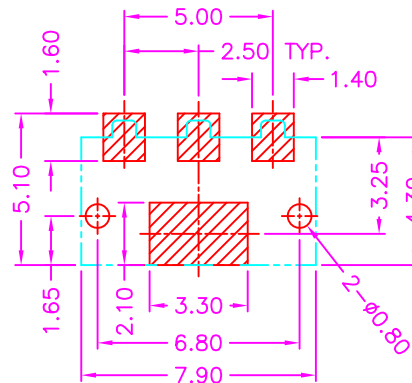
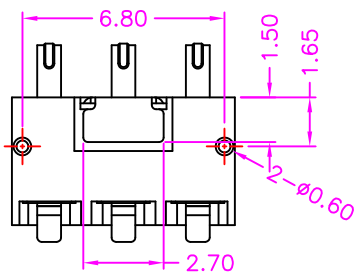
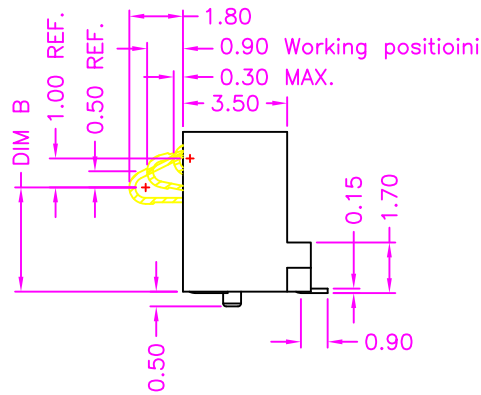


DIMA	DIMB	P/N
6.50	4.50	A
6.00	4.00	B
5.40	3.50	C



P.C.B. LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SOLDER PAD: STAINLESS STEEL, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 3 AMP MAX
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -20°C~+80°C

PART NUMBER:

ABTGY - 0 3 * T - 1 2 1 * *

SERIES ————
 NO. OF POS. ————
 CONTACT PLATED OPTION ————
 POST OPTION
 BLANK: W/O POST
 P: WITH POST
 HEIGHT OPTION
 REF. TABLE
 TAPE REEL PACKAGE
 TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD