

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C




PART NUMBER:

BUSAK - 0 4 * T - 1 2 1


SERIES — NO. OF POS. — CONTACT PLATED OPTION —
 TAPE REEL PACKAGE — TIN PLATING ON SOLDER TAIL —

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

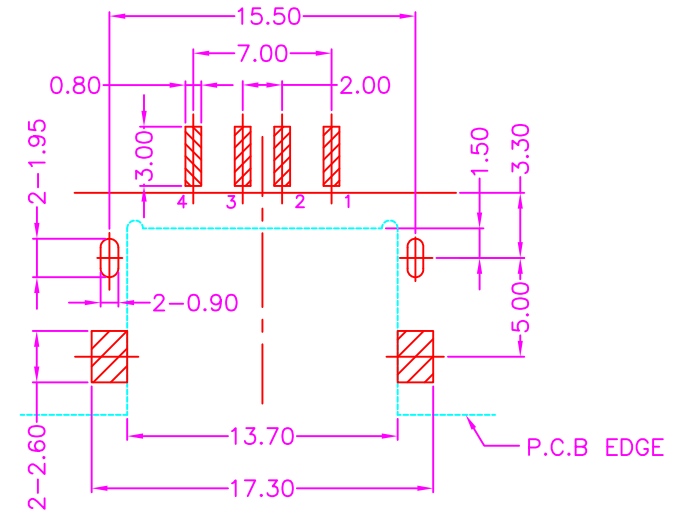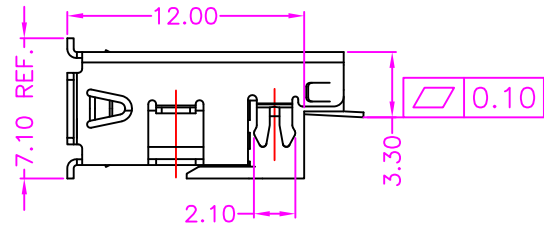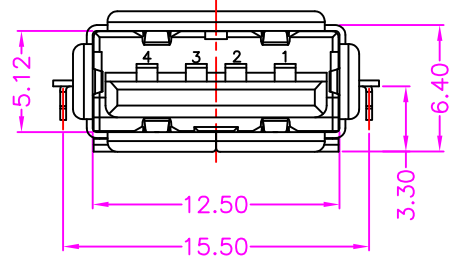

**P.C.B. LAYOUT
 TOP VIEW ±0.05**

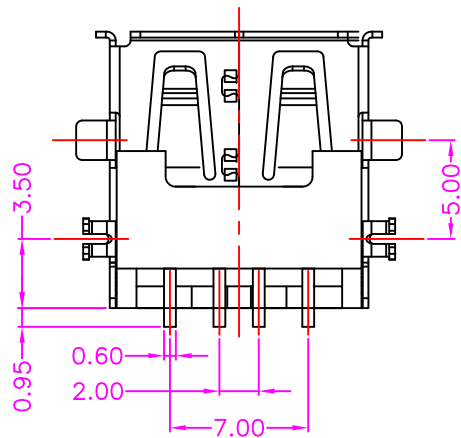

TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2017/11/29	TITLE	USB A TYPE, PCB MID MOUNT, REVERSE TYPE SMT, METAL SHIELD, FEMALE				
		APPROVED BY	Lion 2017/11/29	DRAW NO.	BUSAK-001	UNIT	MM	Sheet	1/1