

A

B

C







D

A

B

C

D

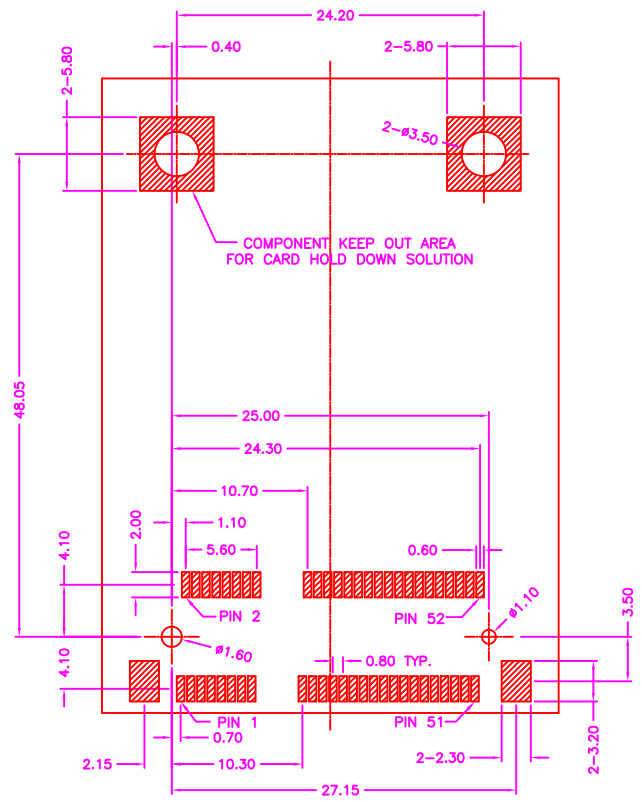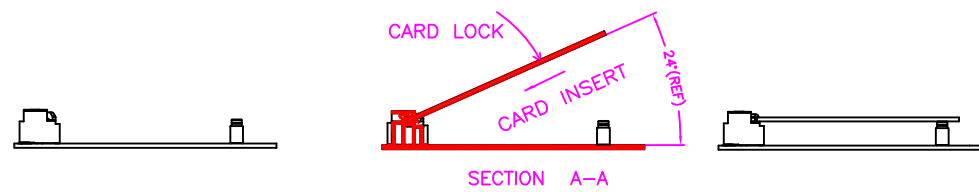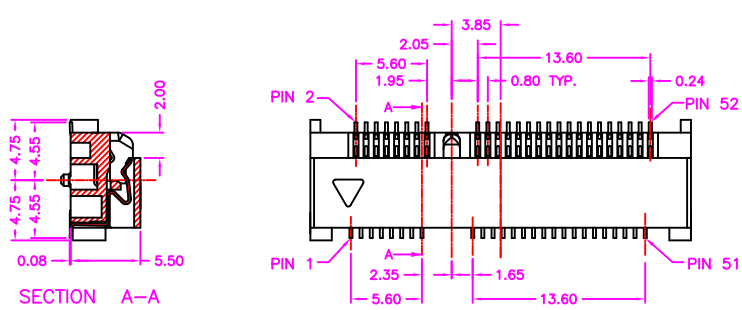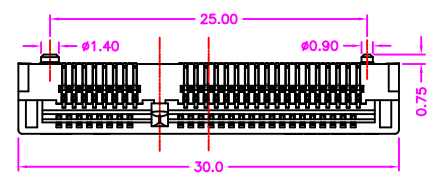

MATERIALS

HOUSING: LCP (UL 94V-0)
 SOLDER PAD: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 55m OHMS MAX
 INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:
 MCEFT - 5 2 * - 1 2 3

SERIES NO. OF POS. TAPE REEL PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD









INFORMATION

COMPATIBLE COPPER TUBE DRAWING NO:
 ZMCEFT-001
 COMPATIBLE SCREW DRAWING NO:
 ZMCEFT-002



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2018/3/4	TITLE	MINI PCI EXPRESS, 0.80mm PITCH, PCB MOUNT, SMT, FEMALE, 1 KEY, WITH PAD HEIGHT=5.60mm				
		APPROVED BY	Lion 2018/3/4	DRAW NO.	MCEFT-003	UNIT	MM	Sheet	1/2

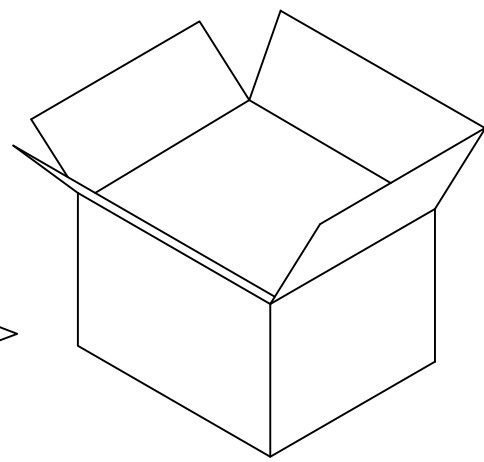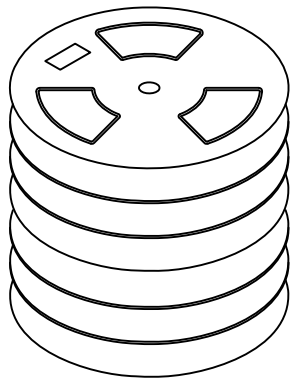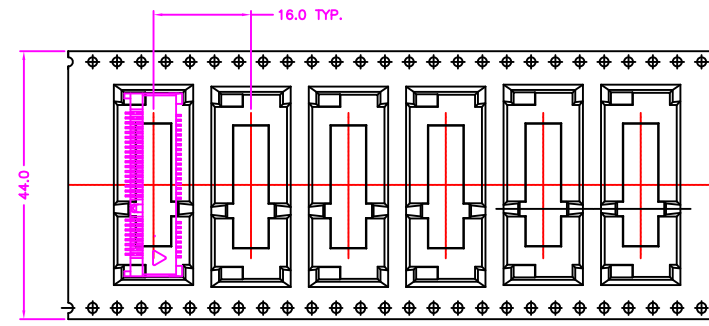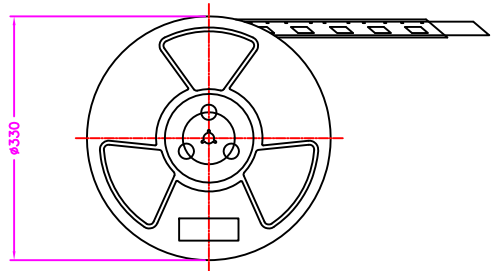

NOTE: 550PCS/ REEL, 3300PCS/ 6 REEL/ CARTON