


P.C.B. LAYOUT
TOP VIEW ±0.05

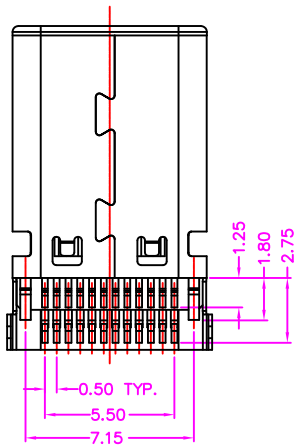

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: STEEL ALLOY, NICKEL PLATING
SOLDER PAD: COPPER ALLOY, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA, TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C ~ +85°C

PART NUMBER:

BUSJD - 2 4 * T - 2 * 1 *

SERIES

NO. OF POS.

RIB OPTION
BLANK: WITHOUT RIB
R: WITH RIB

PACKAGE OPTION
1: TRAY
2: TAPE REEL

TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

- 1: 1u" GOLD
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

PIN NUMBER		PIN NUMBER	
PIN A1	GND	PIN B12	GND
PIN A2	TX1+	PIN B11	RX1+
PIN A3	TX1-	PIN B10	RX1-
PIN A4	VBUS	PIN B9	VBUS
PIN A5	CC	PIN B8	SBU2
PIN A6	D+	PIN B7	D-
PIN A7	D-	PIN B6	D+
PIN A8	SBU1	PIN B5	VCONN
PIN A9	VBUS	PIN B4	VBUS
PIN A10	RX2-	PIN B3	TX2-
PIN A11	RX2+	PIN B2	TX2+
PIN A12	GND	PIN B1	GND

