

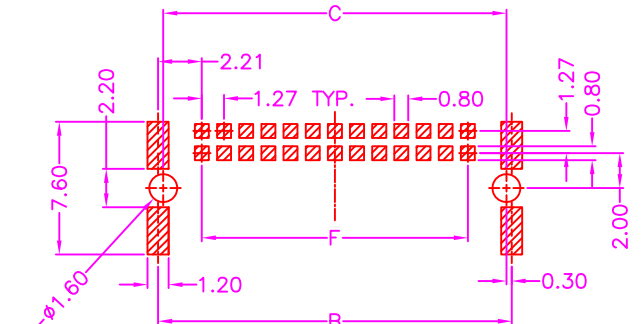


SCALE 2:1



P.C.B LAYOUT
TOP VIEW ±0.05

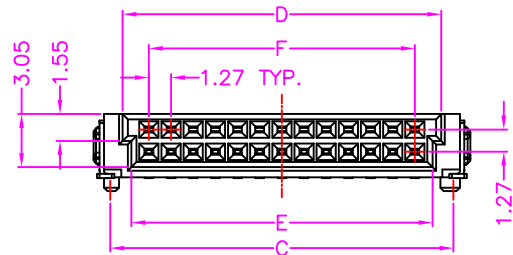

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SOLDER PAD: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.2 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 25m OHMS
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+125°C

PART NUMBER:

ASMB - * * * T - 1 2 1

SERIES



TAPE REEL PACKAGE

NO. OF POS.
REF. TABLE


TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD








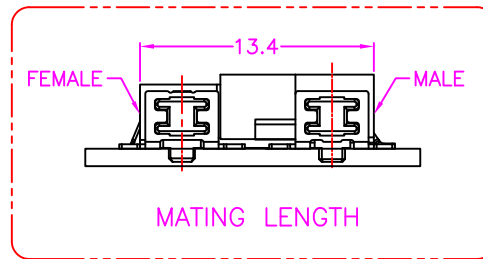
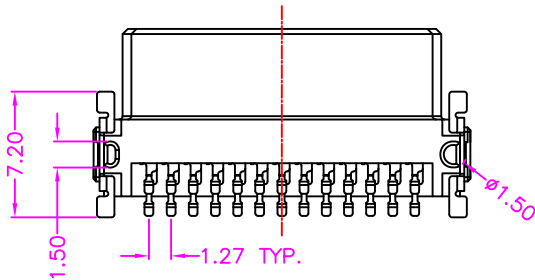


MATING LENGTH



TABLE

POS.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
12	12.70	11.34	10.77	9.37	8.37	6.35
16	15.24	13.88	13.31	11.91	10.91	8.89
20	17.78	16.42	15.85	14.45	13.45	11.43
26	21.59	20.23	19.66	18.26	17.26	15.24
30	24.13	22.77	22.20	20.80	19.80	17.78
32	25.40	24.04	23.47	22.07	21.07	19.05
40	30.48	29.12	28.55	27.15	26.15	24.13
50	36.83	35.47	34.90	33.50	32.50	30.48
68	48.26	46.90	46.33	44.93	43.93	41.91
80	55.88	54.52	53.95	52.55	51.55	49.53

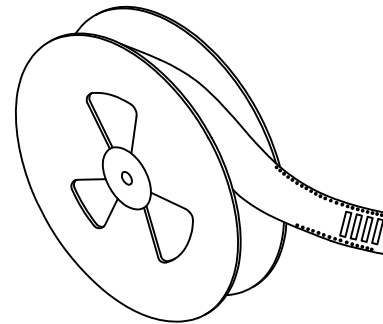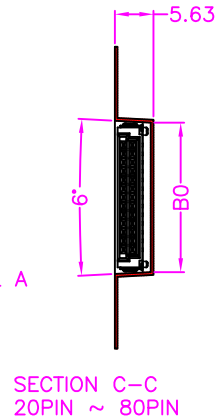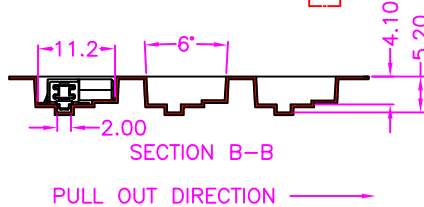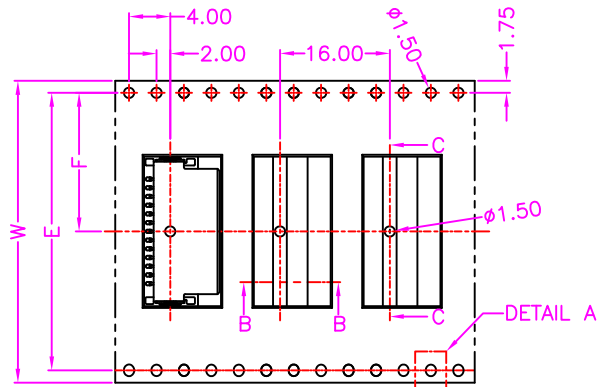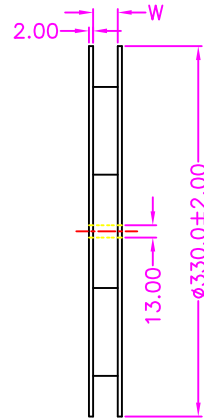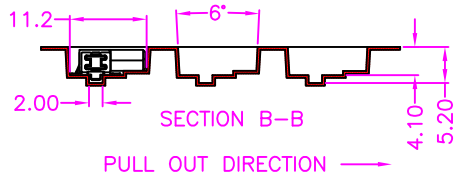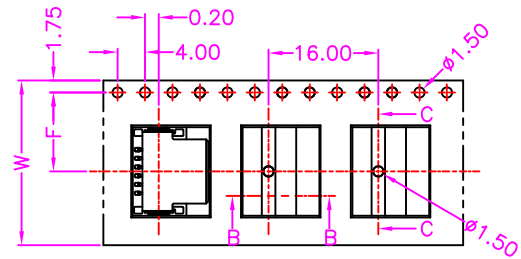

POS.	PCS/PER REEL	REEL/OUTSIDE CTN	PCS/OUTSIDE CTN	CTN SIZE
12	700	7	4900	350*350*260
16				
20		5	3500	
24				
26		4	2800	
30				
32		3	2100	
40				
50	5	3500	350*350*460	
68				
80				

POS.	B0±0.15	F±0.10	E±0.10	W ^{+0.30} _{-0.10}
12P	12.90	11.50	28.40	24.00
16P				
20P	18.00	14.20	28.40	32.00
24P				
26P				
30P	21.79	20.20	40.40	44.00
32P				
40P				
50P	37.03	26.20	52.40	56.00
68P	48.46	34.20	68.40	72.00
80P	56.08			