

P.C.B. LAYOUT  
TOP VIEW ±0.05

**MATERIALS**


HOUSING: HI-TEMP. PLASTIC (UL 94V-0)  
 SHELL: COPPER ALLOY, NICKEL PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

**SPECIFICATION**

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

**PART NUMBER:**

BUSAE - 0 4 \* T - 1 \* 4 \*

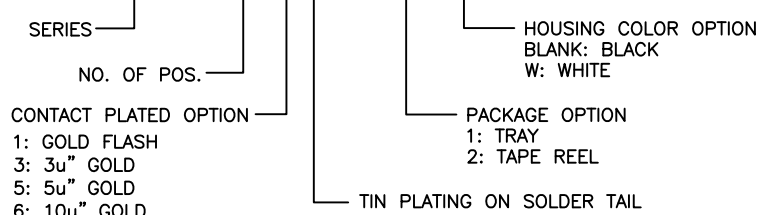

TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2018/5/16
		APPROVED BY	Lion 2018/5/16

TITLE	USB A TYPE, PCB MID MOUNT, R/A, METAL SHIELD, FEMALE			
DRAW NO.	BUSAE-004	UNIT	MM	Sheet
				1/1