


MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLUE
 FRONT SHELL: COPPER ALLOY, NICKEL PLATING
 MIDDLE SHELL: SUS
 REAR SHELL: SUS
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

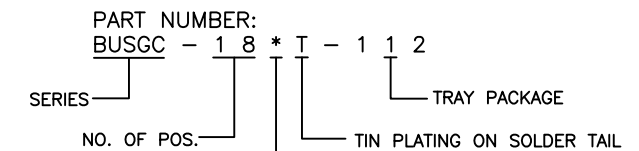

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

PIN NUMBER	SIGNAL NAME
1,10	VBUS
2,11	D-
3,12	D+
4,13	GND
5,14	StdA_SSRX-
6,15	StdA_SSRX+
7,16	GND_DRAIN
8,17	StdA_SSTX-
9,18	StdA_SSTX+
Shell	Shield