


### MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)  
 SHELL: COPPER ALLOY OR SPCC, NICKEL PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL


### SPECIFICATION

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

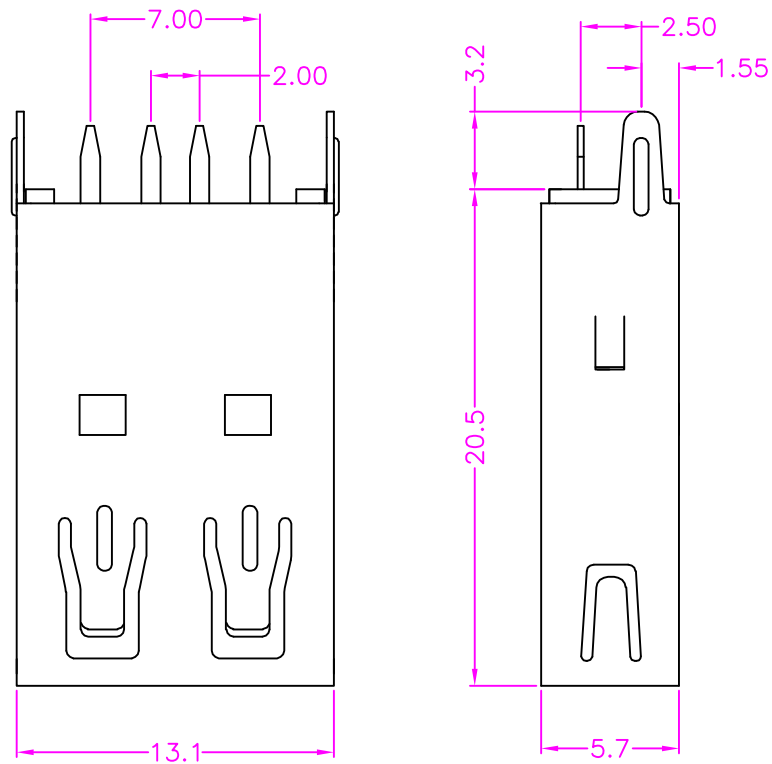

### PART NUMBER:

BUSAA - 0 4 \* T \* - 1 1 5 \*

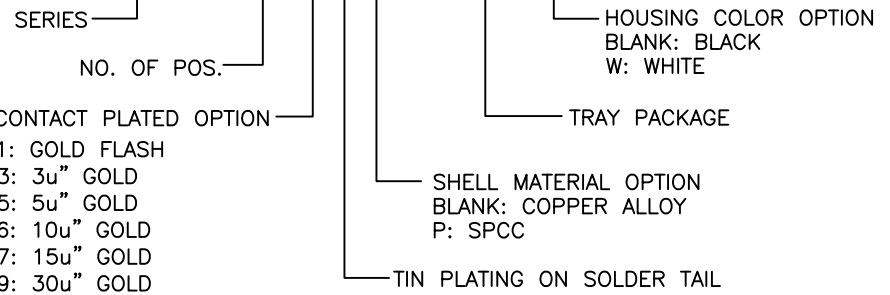

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD
- BLANK: BLACK
- W: WHITE
- BLANK: COPPER ALLOY
- P: SPCC

