



P.C.B. LAYOUT
TOP VIEW ±0.05

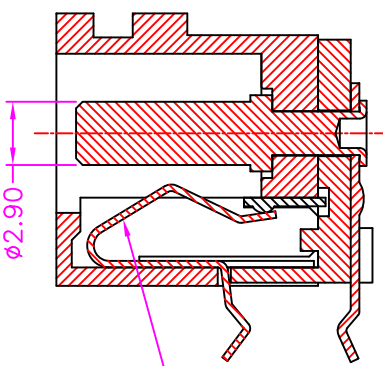

SPRING TERMINAL



MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
 INNER PIN: COPPER ALLOY, SILVER PLATING
 SPRING TERMINAL: TITANIUM ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, SILVER PLATING

SPECIFICATION

CURRENT RATING: 24V, 5 AMP MAX.
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C


PART NUMBER:

JPJAA - 1 - 1 1 2

SERIES

TRAY PACKAGE

∅3.00mm INNER PIN



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10


REV.

A

DRAWN BY Zhong 2018/8/8

TITLE

DC POWER JACK, PCB MOUNT, R/A, INNER PIN ∅3.00mm



APPROVED BY Lion 2018/8/8

DRAW NO.

JPJAA-002

UNIT

MM

Sheet

1/1