


P.C.B LAYOUT
TOP VIEW ±0.05

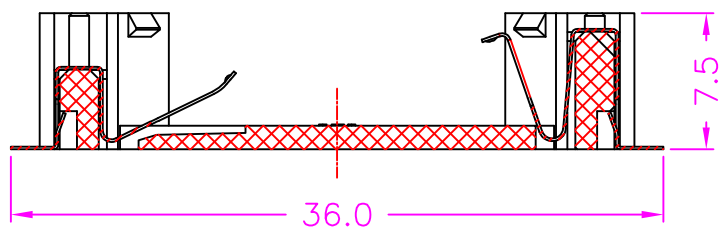

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
TERMINAL: COPPER ALLOY

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:

ABREA - * - 0 * 1

SERIES

PACKAGE OPTION

- 1: TRAY
- 4: BAG
- 5: BOX

TERMINAL PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD
- T: TIN



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2019/3/22	TITLE	BATTERY HOLDER, SMT, ALL PLASTIC, CR2450				
		APPROVED BY	Lion 2019/3/22	DRAW NO.	ABREA-001	UNIT	MM	Sheet	1/1