


FRONT PANEL JACK ONLY CLEARANCE WITHOUT LATCH FEATURE

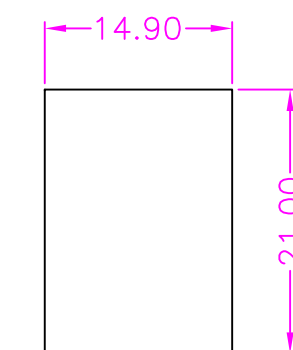

SINGLE PANEL LATCH CLEARANCE PANEL THICKNESS 1.60mm

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINAL: Ø0.45mm COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:
 SAMJMJ - * - 7 * 2

SERIES — PACKAGE OPTION
 1: TRAY
 4: BAG
 FEMALE/FEMALE

TERMINAL PLATED OPTION
 1: GOLD FLASH
 3: 3u" GOLD
 6: 10u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD
 11: 6u" GOLD



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2019/6/12	TITLE	ADAPTER, RJ12 VERTICAL FEMALE TO RJ12 VERTICAL FEMALE				
		APPROVED BY	Lion 2019/6/12	DRAW NO.	SAMJMJ-002	UNIT	MM	Sheet	1/1