


P.C.B. LAYOUT
TOP VIEW ±0.05

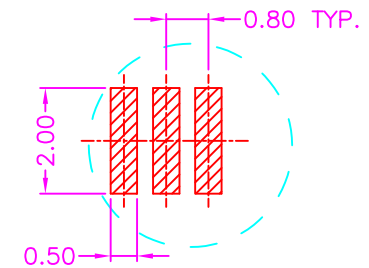

DETAIL A (SCALE 2:1)

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.0 AMP MAX
 DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 40m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:

FSCKB - 2 0 * T - 1 2 1

SERIES — NO. OF POS. — CONTACT PLATED OPTION — TIN PLATING ON SOLDER TAIL — TAPE REEL PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD



TOLERANCES
 X.±0.40 .XX±0.20
 .X±0.30 .XXX±0.10


REV.

A

DRAWN BY Zhong 2019/7/9

TITLE

SFP28 CONNECTOR, PCB MOUNT, SMT, WITH POST



APPROVED BY Lion 2019/7/9

DRAW NO.

FSCKB-001

UNIT

MM

Sheet

1/1