


P.C.B. LAYOUT
TOP VIEW ±0.05

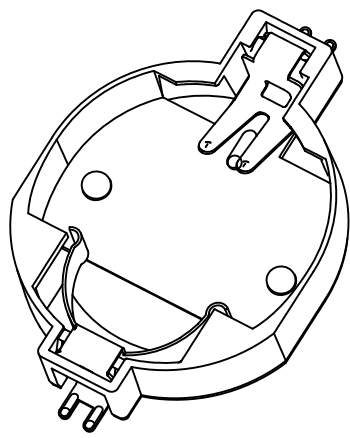

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+80°C

PART NUMBER:
ABRBA - 1 - 0 * 4

SERIES ————
GOLD PLATING ON TERMINAL ————

PACKAGE OPTION
1: TRAY
2: TAPE REEL