

A

B

C




D

A


B

C



D

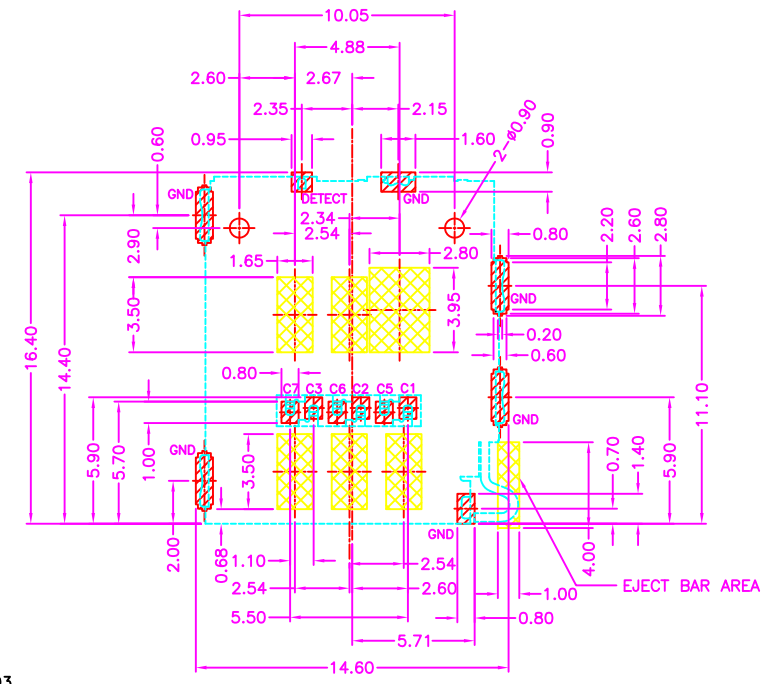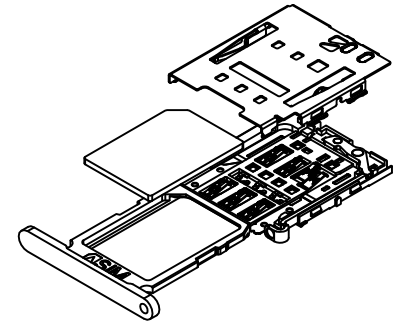

P.C.B. LAYOUT
TOP VIEW ±0.05

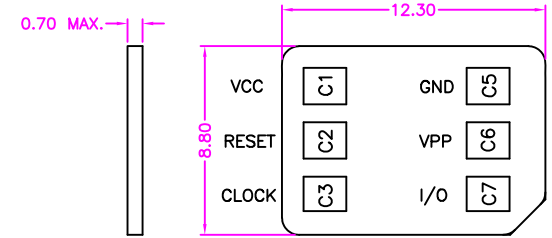

Circuit Diagram For Switch

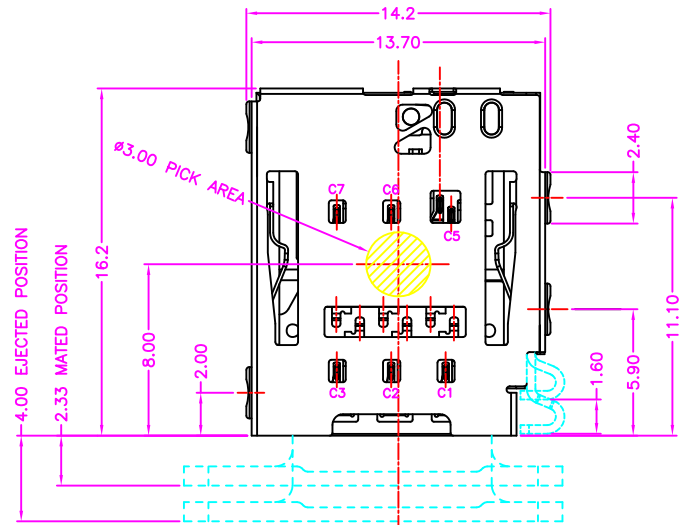

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SHELL: STAINLESS STEEL, NICKEL PLATING
SOLDER PAD: STAINLESS STEEL, GOLD FLASH
TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION


CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

INFORMATION

COMPATIBLE NANO SIM TRAY DRAWING NO: ZMMCRB-003



PART NUMBER:

MMCRB - 0 6 * - 1 2 3



CONTACT PLATED OPTION


- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

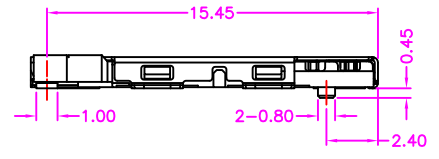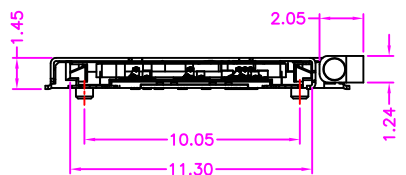

TOLERANCES

X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2018/10/15	TITLE	NANO SIM CARD, 6PIN, PCB MOUNT, SMT, METAL SHIELD, TRAY TYPE H=1.50mm, FEMALE				
		APPROVED BY	Lion 2018/10/15	DRAW NO.	MMCRB-003	UNIT	MM	Sheet	1/2

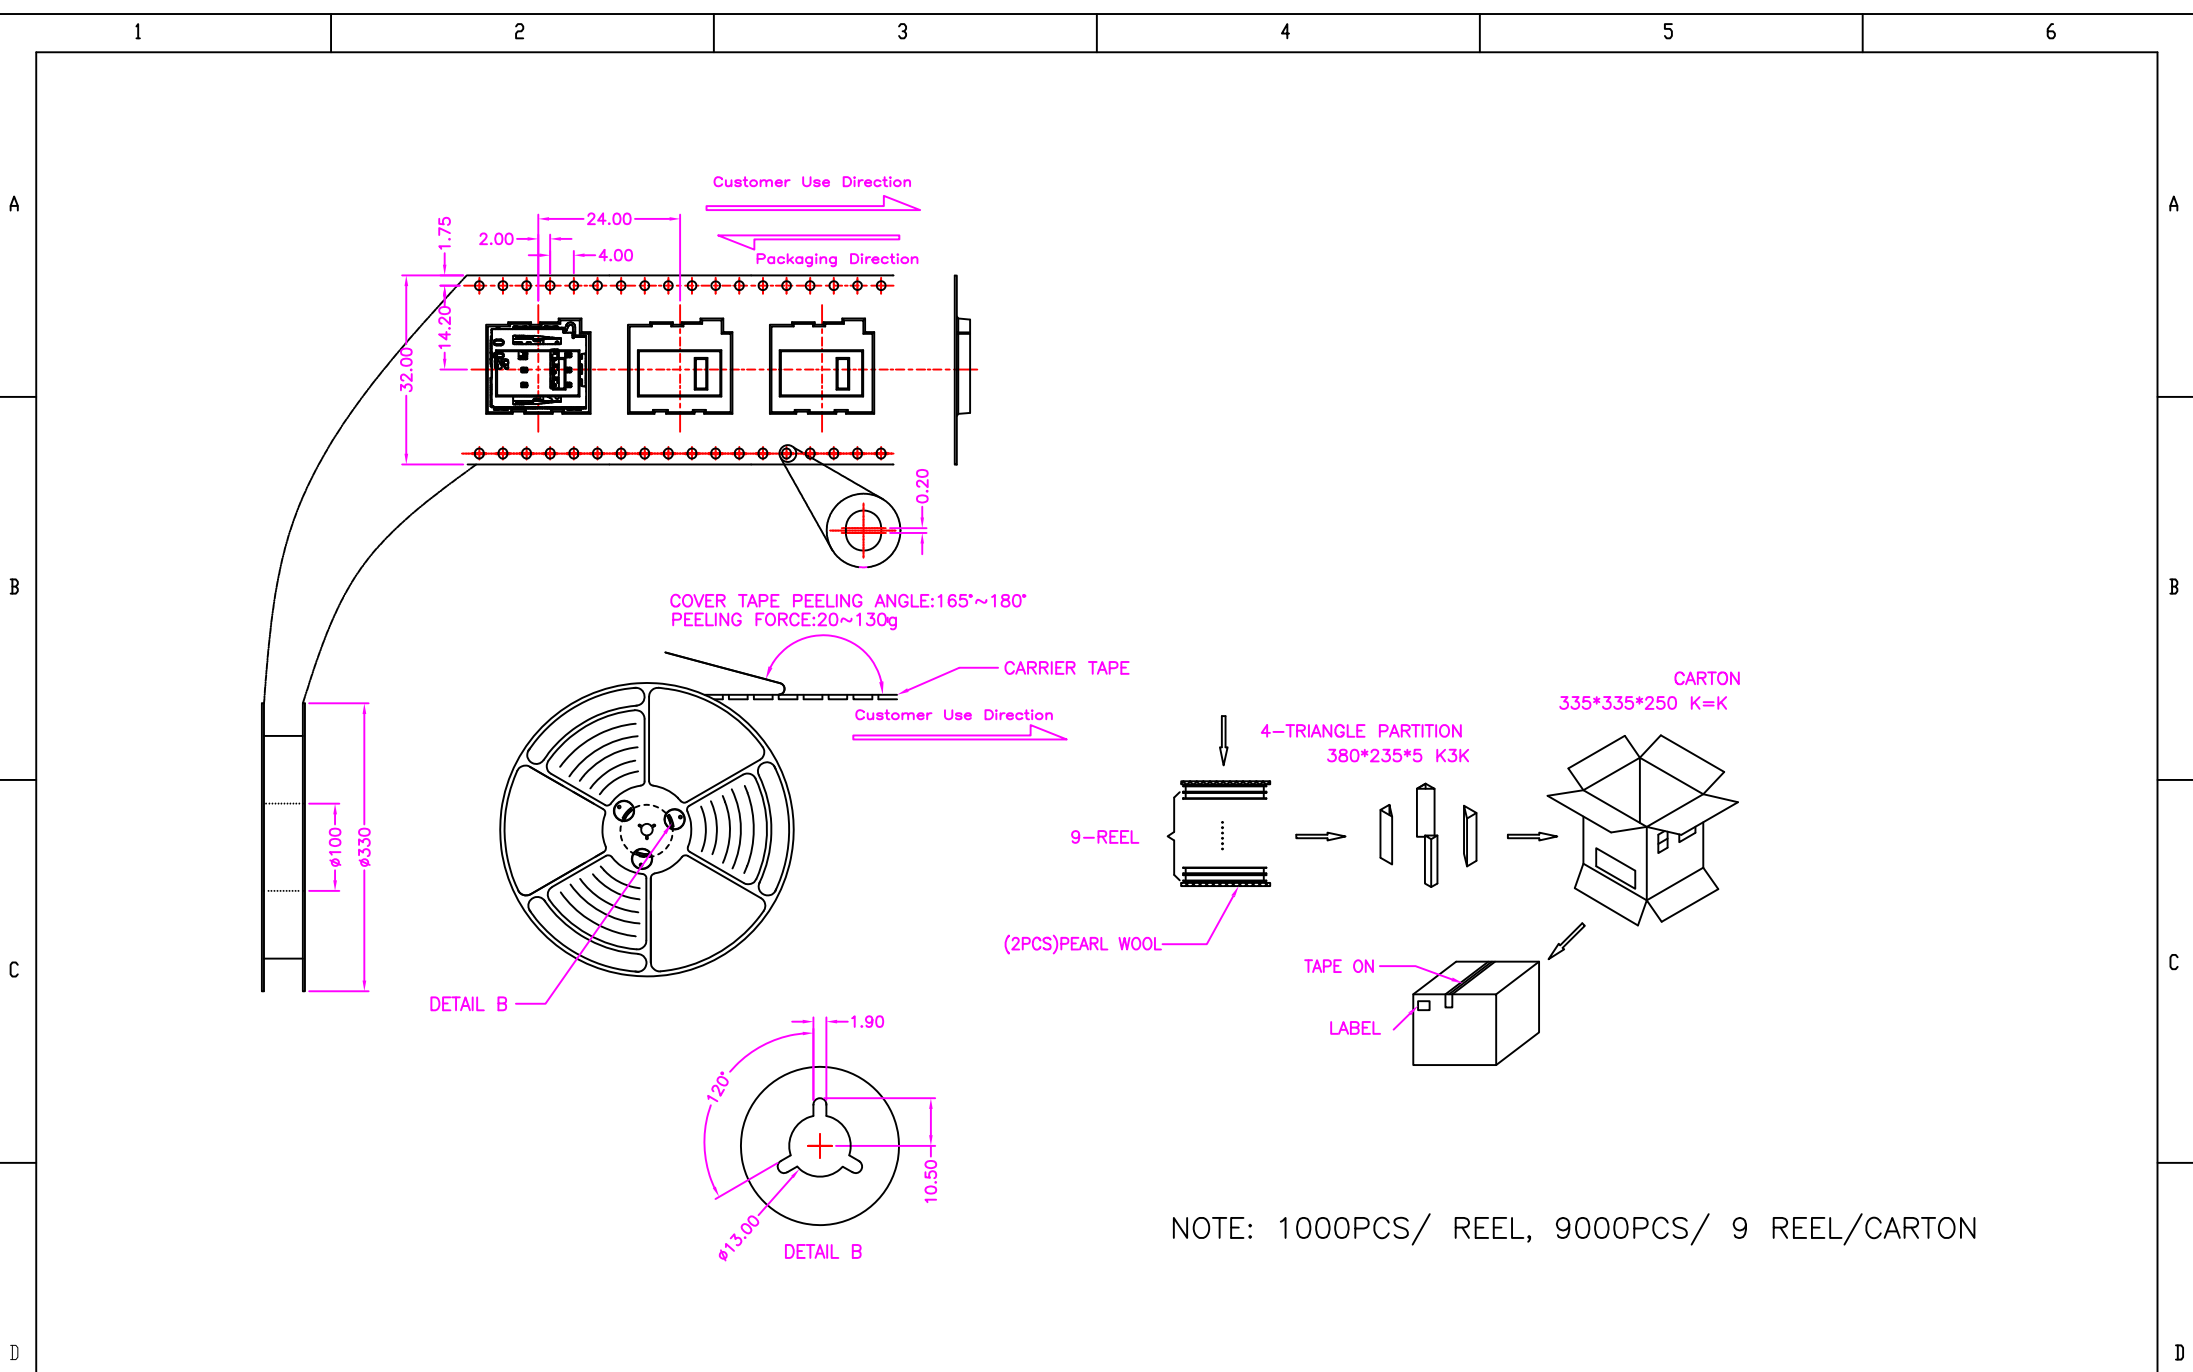

NOTE: 1000PCS/ REEL, 9000PCS/ 9 REEL/CARTON



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A

DRAWN BY	Zhong 2018/10/15
APPROVED BY	Lion 2018/10/15

TITLE	
DRAW NO.	

NANO SIM CARD, 6PIN, PCB MOUNT, SMT, METAL SHIELD, TRAY TYPE H=1.50mm, FEMALE				
MMCRB-003	UNIT	MM	Sheet	2/2