

### MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK  
 SHELL: COPPER ALLOY OR SPCC, NICKEL PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

### SPECIFICATION

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 50m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V  
 OPERATION TEMPERATURE: -40°C~+85°C


PART NUMBER:  
**BUSMB - 0 5 \* T \* - 1 \* 2**

SERIES — NO. OF POS. — CONTACT PLATED OPTION — SHELL MATERIAL OPTION — TIN PLATING ON SOLDER TAIL — PACKAGE OPTION

CONTACT PLATED OPTION:  
 1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 6: 10u" GOLD  
 9: 30u" GOLD

SHELL MATERIAL OPTION:  
 BLANK: COPPER ALLOY  
 P: SPCC

PACKAGE OPTION:  
 2: TAPE REEL  
 3: TUBE

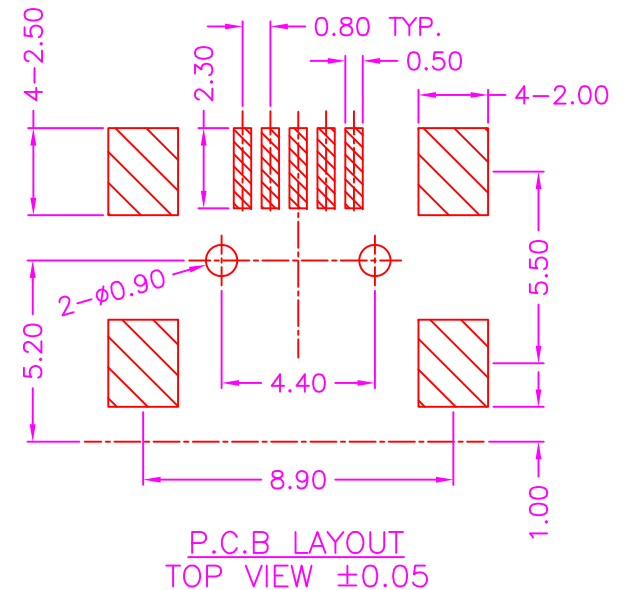

REV.	A	DRAWN BY	Zhong 2019/5/13	TITLE	MINI USB, B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE				
		APPROVED BY	Lion 2019/5/13	DRAW NO.	BUSMB-002	UNIT	MM	Sheet	1/1