

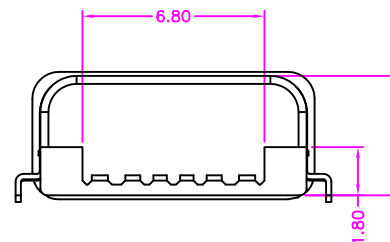

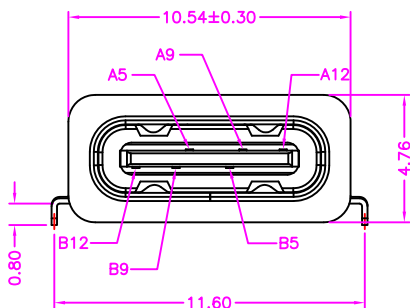
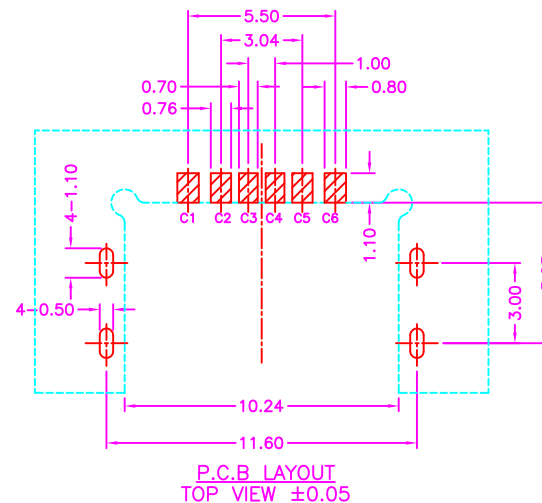


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: STAINLESS STEEL, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL
 SEALING RING: RUBBER

SPECIFICATION



CURRENT RATING: 3 AMP MAX
 DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 40m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 300V
 OPERATION TEMPERATURE: -40°C~+85°C

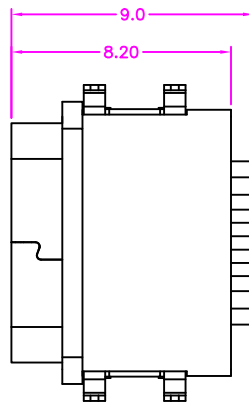

PART NUMBER:
BUSJU - 0 6 * T - 1 * 3

SERIES — NO. OF POS. — TIN PLATING ON SOLDER TAIL — PACKAGE OPTION
 1: TRAY
 2: TAPE REEL

CONTACT PLATED OPTION
 1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD

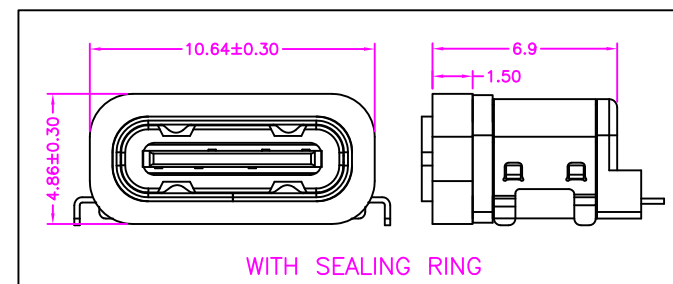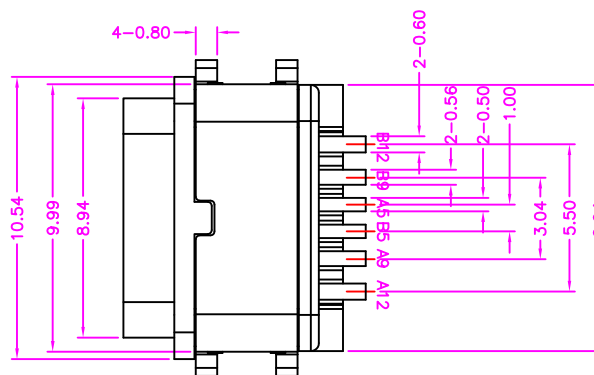


PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	A5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6



TOLERANCES
 X.±0.40 .XX±0.20
 .X±0.30 .XXX±0.10



REV. A

DRAWN BY Zhong 2020/5/19
 APPROVED BY Lion 2020/5/19

TITLE
 DRAW NO.

USB C TYPE, PCB MID MOUNT, WATERPROOF, SMT, METAL SHIELD, FEMALE (IPX7)
 BUSJU-003 UNIT MM Sheet 1/1