


MATERIALS


INSULATOR: PBT (UL 94V-0), WHITE
 BODY: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

FREQUENCY RANGE: DC-3.0 GHz
 VSWR: 1.30 MAX.
 OPERATION TEMPERATURE: -40°C~+105°C

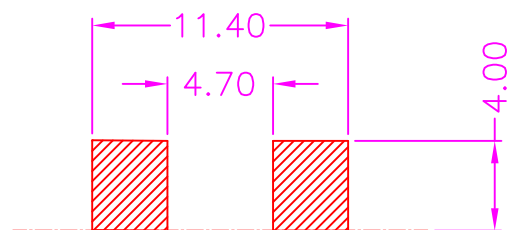

TOP VIEW±0.05

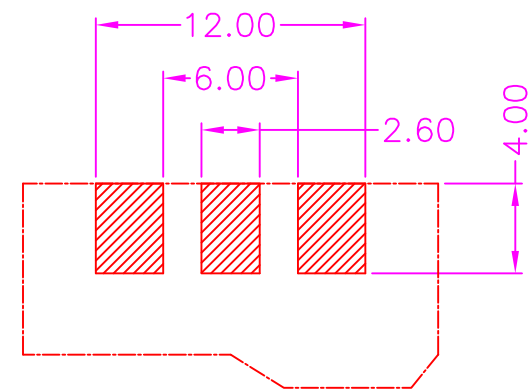

BOTTOM VIEW±0.05

STRADDLE TYPE P.C.B LAYOUT
 THICKNESS 1.60mm

PART NUMBER:
 RFTDC - 7 T 1 - 1 * 5

SERIES

PACKAGE OPTION

1: TRAY
 4: BAG

TIN PLATING ON TERMINAL