
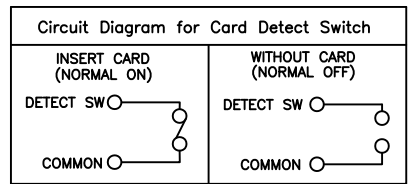


P.C.B LAYOUT
TOP VIEW ±0.05

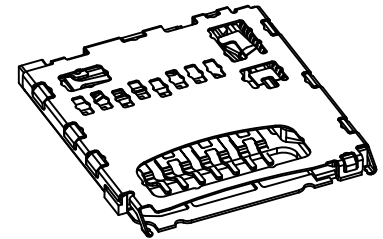

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATING
 SOLDER PAD: STAINLESS STEEL, GOLD PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:

MMCKD - 0 8 * - 1 2 8

SERIES ———— TAPE REEL PACKAGE

NO. OF POS. ————

CONTACT PLATED OPTION


- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

PIN NO.	DISCRIPTION
Pin 1	DAT2:Data line
Pin 2	CD/DAT3:card Detect/Data line
Pin 3	CMD:command/Response
Pin 4	VDD: Supply voltage
Pin 5	CLK:Clock
Pin 6	VSS:Supply voltage ground
Pin 7	DAT0:Data line
Pin 8	DAT1:Data line
Pin 9	GND
Pin 10	COMMON
Pin 11	DETECT SW(GND)





TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2018/10/17	TITLE	MICRO SD, PCB MOUNT, SMT, METAL SHIELD PUSH-PUSH TYPE H=1.30mm, FEMALE				
		APPROVED BY	Lion 2018/10/17	DRAW NO.	MMCKD-008	UNIT	MM	Sheet	1/2

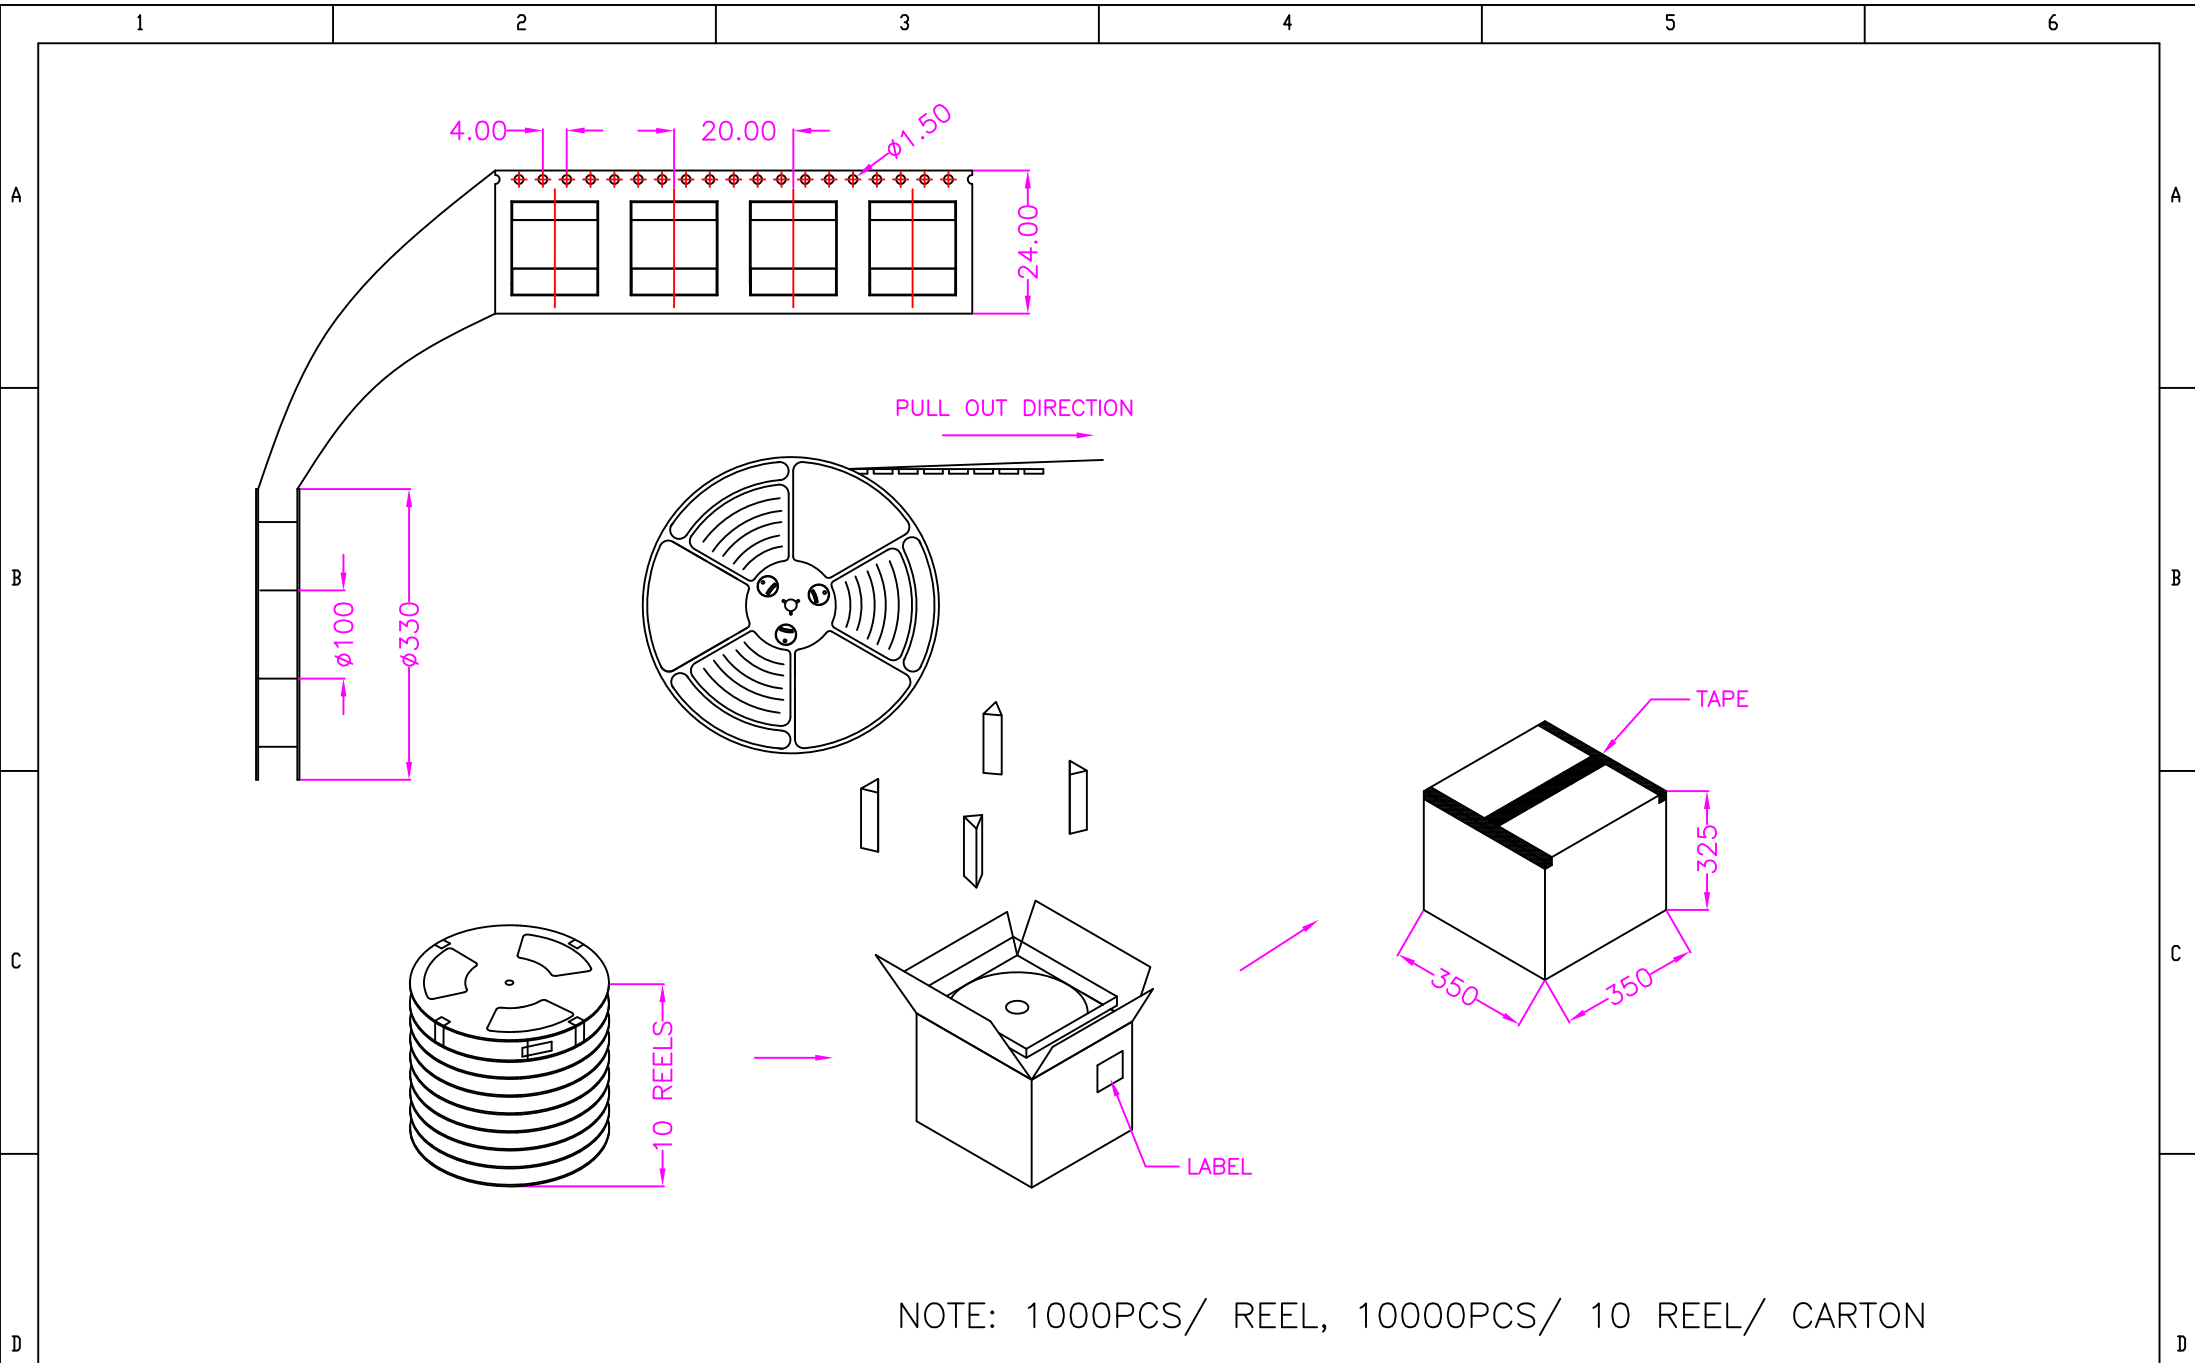

NOTE: 1000PCS/ REEL, 10000PCS/ 10 REEL/ CARTON

 <p>ZICONN ELECTRONIC CO., LTD. WWW.ZICONN.COM 886-3-4687695</p>	<p>TOLERANCES</p> <p>X.±0.40 .XX±0.20</p> <p>.X±0.30 .XXX±0.10</p>	REV.	A	DRAWN BY	Zhong 2018/10/17	TITLE	MICRO SD, PCB MOUNT, SMT, METAL SHIELD PUSH-PUSH TYPE H=1.30mm, FEMALE			
			APPROVED BY	Lion 2018/10/17	DRAW NO.	MMCKD-008	UNIT	MM	Sheet	2/2