


**MATERIALS**



HOUSING: THERMOPLASTIC (UL 94V-0), BLUE  
 TERMINAL: COPPER ALLOY, GOLD PLATED

**SPECIFICATION**


CURRENT RATING: 3 AMP MAX  
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 20m OHMS MAX  
 INSULATION RESISTANCE: 5000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -55°C~+85°C

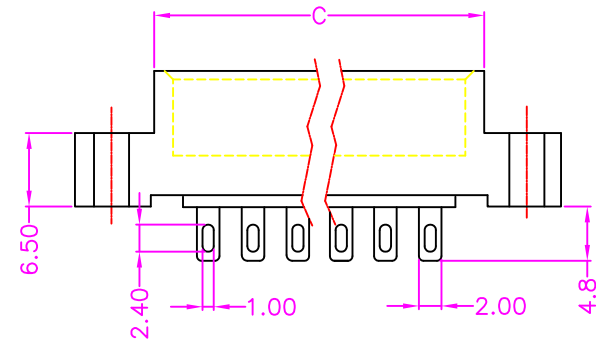

**SOLDER TYPE**

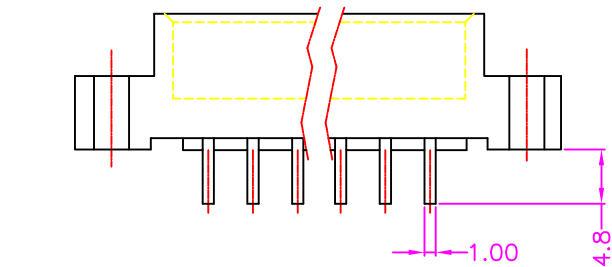

**DIP TYPE**



**PART NUMBER:**

MCEAB - \* \* \* - 1 \* 1 \*

SERIES

NO. OF POS.

TYPE OPTION  
 D: DIP TYPE  
 S: SOLDER TYPE

PACKAGE OPTION

4: BAG  
 5: BOX

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

POS.	DIMENSION					POS.	DIMENSION				
	A	B	C	D	E		A	B	C	D	E
10	41.24	34.94	27.40	24.06	15.84	64	148.16	141.86	134.32	130.98	122.76
12	45.20	38.90	31.36	28.02	19.80	70	160.04	153.74	146.20	142.86	134.64
16	53.12	46.82	39.28	35.94	27.72	72	164.00	157.70	150.16	146.82	138.60
20	61.04	54.74	47.20	43.86	35.64	86	191.48	185.49	177.88	174.54	166.32
22	65.00	58.70	51.16	47.82	39.60						
24	68.96	62.66	55.12	51.78	43.56						
26	72.92	66.62	59.08	55.74	47.52						
30	80.84	74.54	67.00	63.66	55.44						
32	84.80	78.50	70.96	67.62	59.40						
36	92.72	86.42	78.88	75.54	67.32						
40	100.64	94.34	86.80	83.46	75.24						
44	108.56	102.26	94.72	91.38	83.16						
48	116.48	110.18	102.64	99.30	91.08						
50	120.44	114.14	106.60	103.26	95.04						
56	132.32	126.02	118.48	115.14	106.92						
60	140.24	133.94	126.40	123.06	114.84						
62	144.20	137.90	130.36	127.02	118.80						