

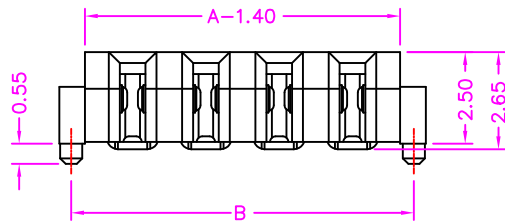


WITH MYLAR

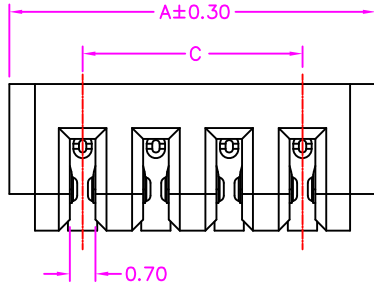

PART NUMBER:
 ABLPX - * * * - 1 * 1

SERIES — * * * — PACKAGE OPTION
 NO. OF POS. — 1 — 2: TAPE REEL
 REF. TABLE — * — 3: TUBE
 7: TAPE REEL (WITH MYLAR)

CONTACT PLATED OPTION


- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

MATERIALS



HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 7 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 500M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -40°C~+85°C

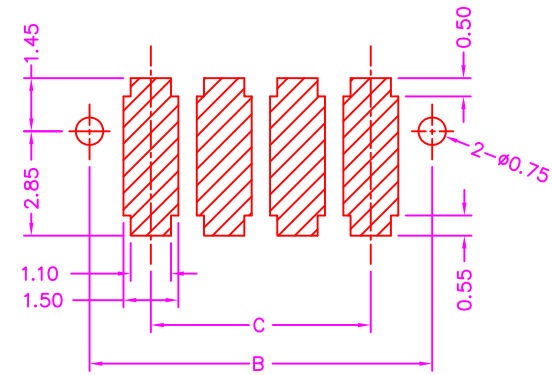

P.C.B LAYOUT
 TOP VIEW ±0.05

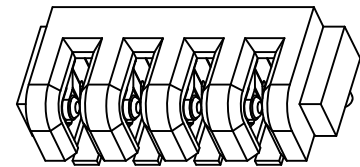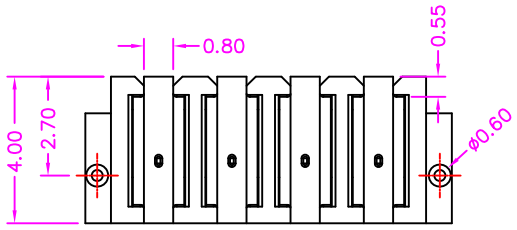

TABLE

POS.	A	B	C
03	8.00	7.35	4.00
04	10.00	9.35	6.00
05	12.00	11.35	8.00
06	14.00	13.35	10.00
07	16.00	15.35	12.00
08	18.00	17.35	14.00

B	MODIFY DIM.	2018.11.6
A	RELEASE	2018.10.24
REV.	DESCRIPTION	DATE

 ZICONN ELECTRONIC CO., LTD. WWW.ZICONN.COM 886-3-4687695	TOLERANCES		REV.	B	DRAWN BY	Zhong 2018/10/25	TITLE	LAPTOP BATTERY, 2.00mm PITCH, PCB MOUNT, ALL PLASTIC, R/A SMT WITH POST, FEMALE			
	X.±0.40 .XX±0.20	.X±0.30 .XXX±0.10			APPROVED BY	Lion 2018/10/25	DRAW NO.	ABL PX-001	UNIT	MM	Sheet