


MATERIALS

INSULATOR: TEFLON (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATED
 GASKET: SILICONE, RED
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

FREQUENCY RANGE: DC-3 GHz
 VSWR: 1.20 MAX.
 OPERATION TEMPERATURE: -40°C~+85°C

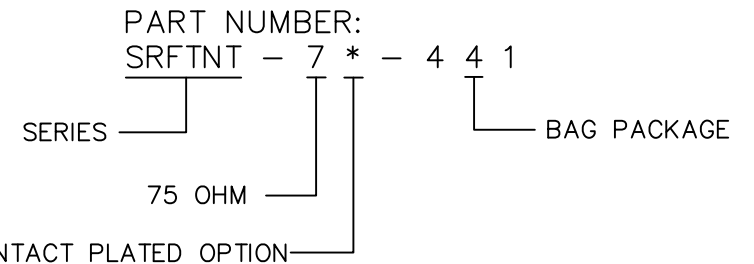

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

*1: ACCEPT MALE PIN RANGE OF 0.70~1.20mm



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Frank 2022/10/21	TITLE	ADAPTER, F TYPE FEMALE TO N TYPE MALE, 75 OHM				
		APPROVED BY	Lion 2022/10/21	DRAW NO.	SRFTNT-001	UNIT	MM	Sheet	1/1