


A

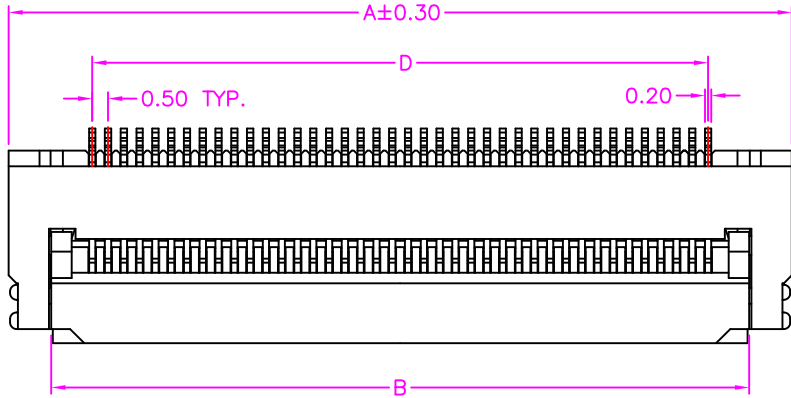

$A = (\text{NUMBER OF POS.}) \times 0.50 + 4.80$   
 $B = (\text{NUMBER OF POS.}) \times 0.50 + 2.10$   
 $C = (\text{NUMBER OF POS.}) \times 0.50 + 1.40$   
 $D = (\text{NUMBER OF POS.} - 1) \times 0.50$



**MATERIALS**

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), NATURAL  
 ACTUATOR: HI-TEMP. PLASTIC (UL 94V-0), BLACK  
 SOLDER PAD: COPPER ALLOY, TIN PLATING  
 TERMINAL: COPPER ALLOY

**SPECIFICATION**

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 50M OHMS MIN AT DC 250V  
 OPERATION TEMPERATURE: -55°C~+85°C


B

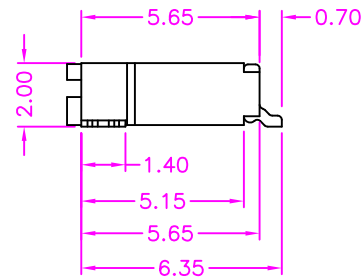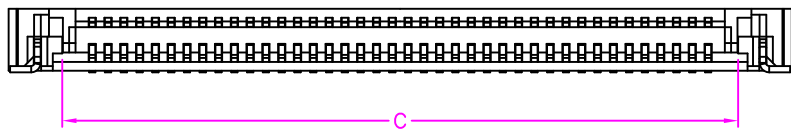


**PART NUMBER:**  
**AFPDF - 4 \* \* \* - 1 \* E**

SERIES: EASY ON  
 NO. OF POS. (10 ~ 60 POS.): 4  
 PACKAGE OPTION: 1 (TUBE)  
 TERMINAL PLATED OPTION: \* (GOLD FLASH)

C

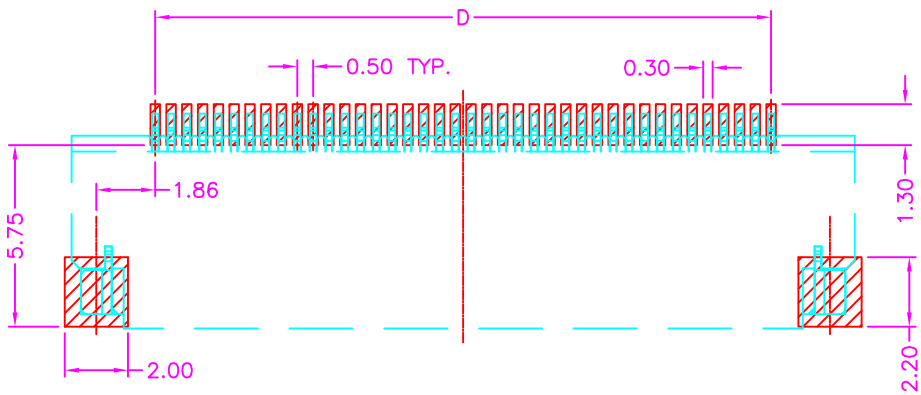

**P.C.B. LAYOUT  
 TOP VIEW ±0.05**

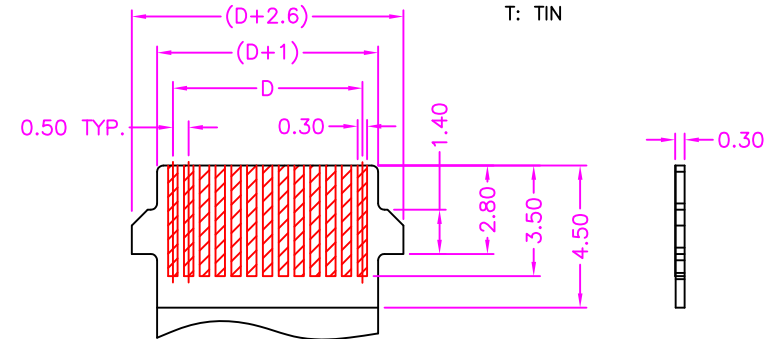

**RECOMMENDED FPC/FFC DIMENSION!**

D



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2019/6/12	TITLE	FPC 0.50mm PITCH, PCB MOUNT, SMT, EASY ON, ZIF, H=2.00mm, FEMALE				
		APPROVED BY	Lion 2019/6/12	DRAW NO.	AFPDF-014	UNIT	MM	Sheet	1/1