

1.00


3.00 TYP.

1.20

1.00

0.20

"Y" REF.
"X" ±0.30

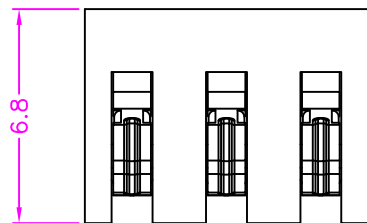


6.8

9.0

TABLE

P/N	X	Y
A	2.4	4.30
B	3.5	5.40

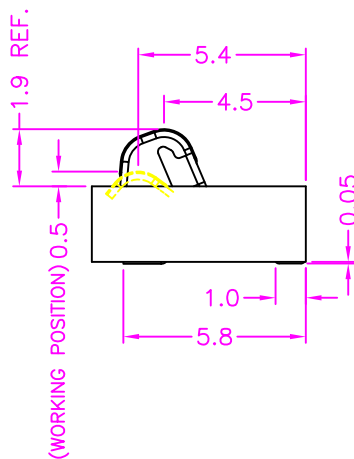

1.9 REF.
(WORKING POSITION) 0.5




5.4

4.5

1.0

5.8

0.05

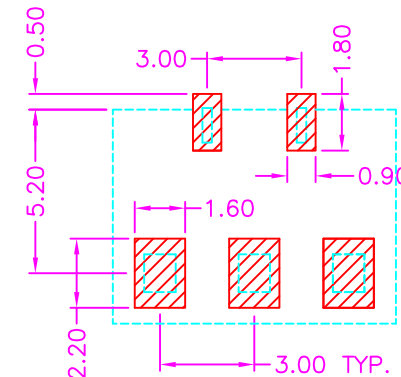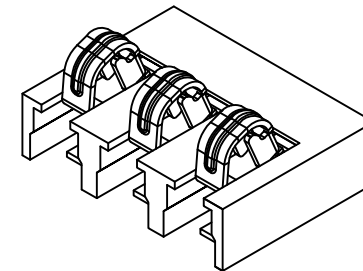

P.C.B. LAYOUT
TOP VIEW ±0.05

PART NUMBER:
ABTDH - 0 3 * - 1 2 1 *

SERIES
NO. OF POS.

"X" & "Y" HEIGHT OPTION
REF TABLE

CONTACT PLATED OPTION
TAPE REEL PACKAGE

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SOLDER PAD: COPPER ALLOY, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 3 AMP MAX
VOLTAGE RATING: 15V MAX
DIELECTRIC WITHSTANDING: 350V AC FOR ONE MINUTE
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 250V
OPERATION TEMPERATURE: -40°C~+85°C

