
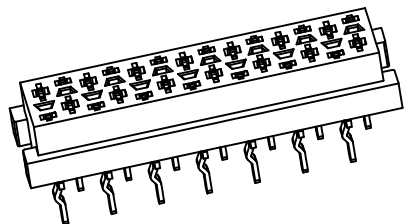




A

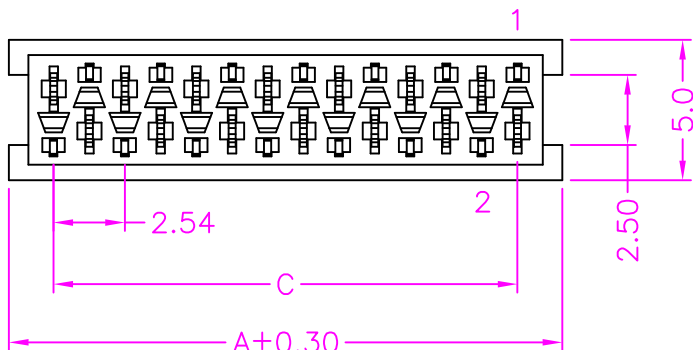

$A = (\text{NUMBER OF POS.}) \times 1.27 + 1.92$
 $B = (\text{NUMBER OF POS.}) \times 1.27 + 0.52$
 $C = (\text{NUMBER OF POS.} - 1) \times 1.27$

A

B

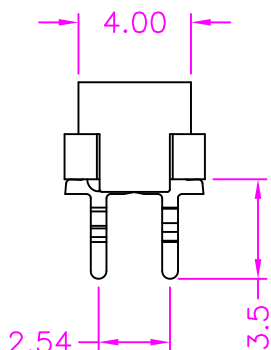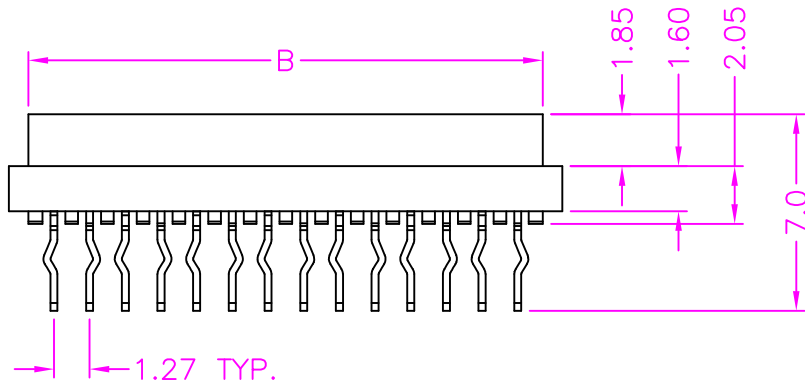

MATERIALS



HOUSING: HI-TEMP. PLASTIC (UL 94V-0), RED
 TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C

B

C

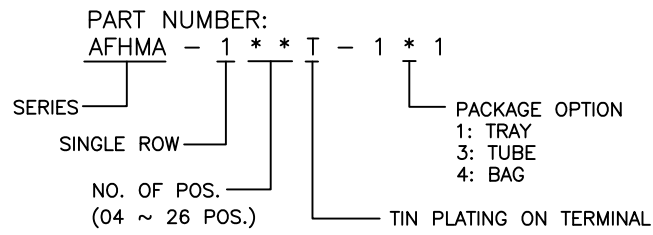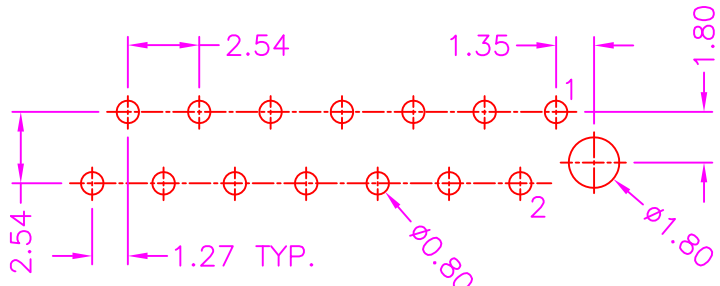

C

D

**P.C.B. LAYOUT
 TOP VIEW ±0.05**

D



TOLERANCES

X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Kiki 2022/10/21	TITLE	MICRO MATCH, 1.27mm PITCH, PCB MOUNT, VERTICAL				
		APPROVED BY	Lion 2022/10/21	DRAW NO.	AFHMA-001	UNIT	MM	Sheet	1/1