
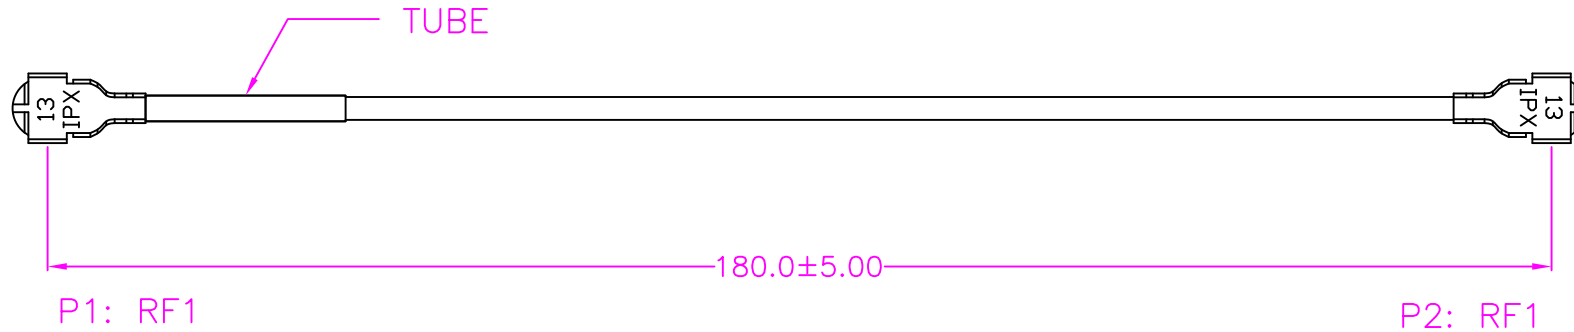


MATED VIEW

MATED VIEW

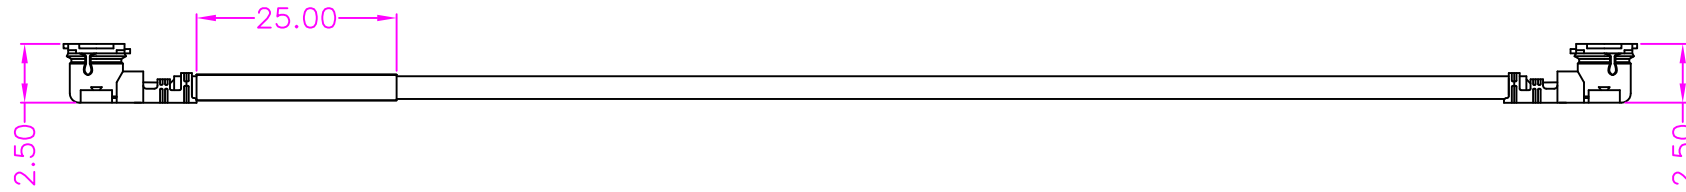

INFORMATION

P1: RF1, BLACK IN INSULATOR COLOR  
 GOLD PLATING ON CONTACT AREA  
 P2: RF1, BLACK IN INSULATOR COLOR  
 GOLD PLATING ON CONTACT AREA  
 TUBE: OD. 1.00x25.0mm, BLACK  
 CABLE: OD. 1.13

SPECIFICATION

IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: 0-6 GHz  
 VSWR: 1.30 MAX AT 0-3 GHz  
 1.50 MAX AT 3-6 GHz  
 DIELECTRIC WITHSTANDING: 200V AC FOR ONE MINUTE  
 INSULATION RESISTANCE: 500M OHM MIN  
 CONTACT RESISTANCE:  
 CENTER CONTACT -20 MILLI-OHMS MAX  
 OUTER CONDUCTOR -20 MILLI-OHMS MAX

PART NUMBER:

LPXPX - \* 1 - 7 4 \*

SERIES

CONTACT PLATED OPTION

CABLE COLOR OPTION  
 BLANK: BLACK  
 G: GRAY  
 W: WHITE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A	DRAWN BY	Zhong 2019/7/25	TITLE	MICRO COAXIAL (RF1) R/A FEMALE TO MICRO COAXIAL (RF1) R/A FEMALE, CABLE				
		APPROVED BY	Lion 2019/7/25	DRAW NO.	LPXPX-004	UNIT	MM	Sheet	1/1