


**MATERIALS**

HOUSING: LCP (UL 94V-0), BLACK  
 SHELL: STAINLESS STEEL, GOLD PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED

**SPECIFICATION**

DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 10m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 100V  
 FREQUENCY RANGE: DC-4 GHz  
 OPERATION TEMPERATURE: -25°C~+85°C

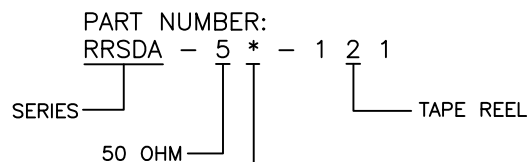

CONTACT PLATED OPTION  
 1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 6: 10u" GOLD  
 9: 30u" GOLD




TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A

DRAWN BY	Mika 2024/1/15
APPROVED BY	Lion 2024/1/15

TITLE	RF SWITCH, R/A SMT				
DRAW NO.	RRSDA-001	UNIT	MM	Sheet	1/2

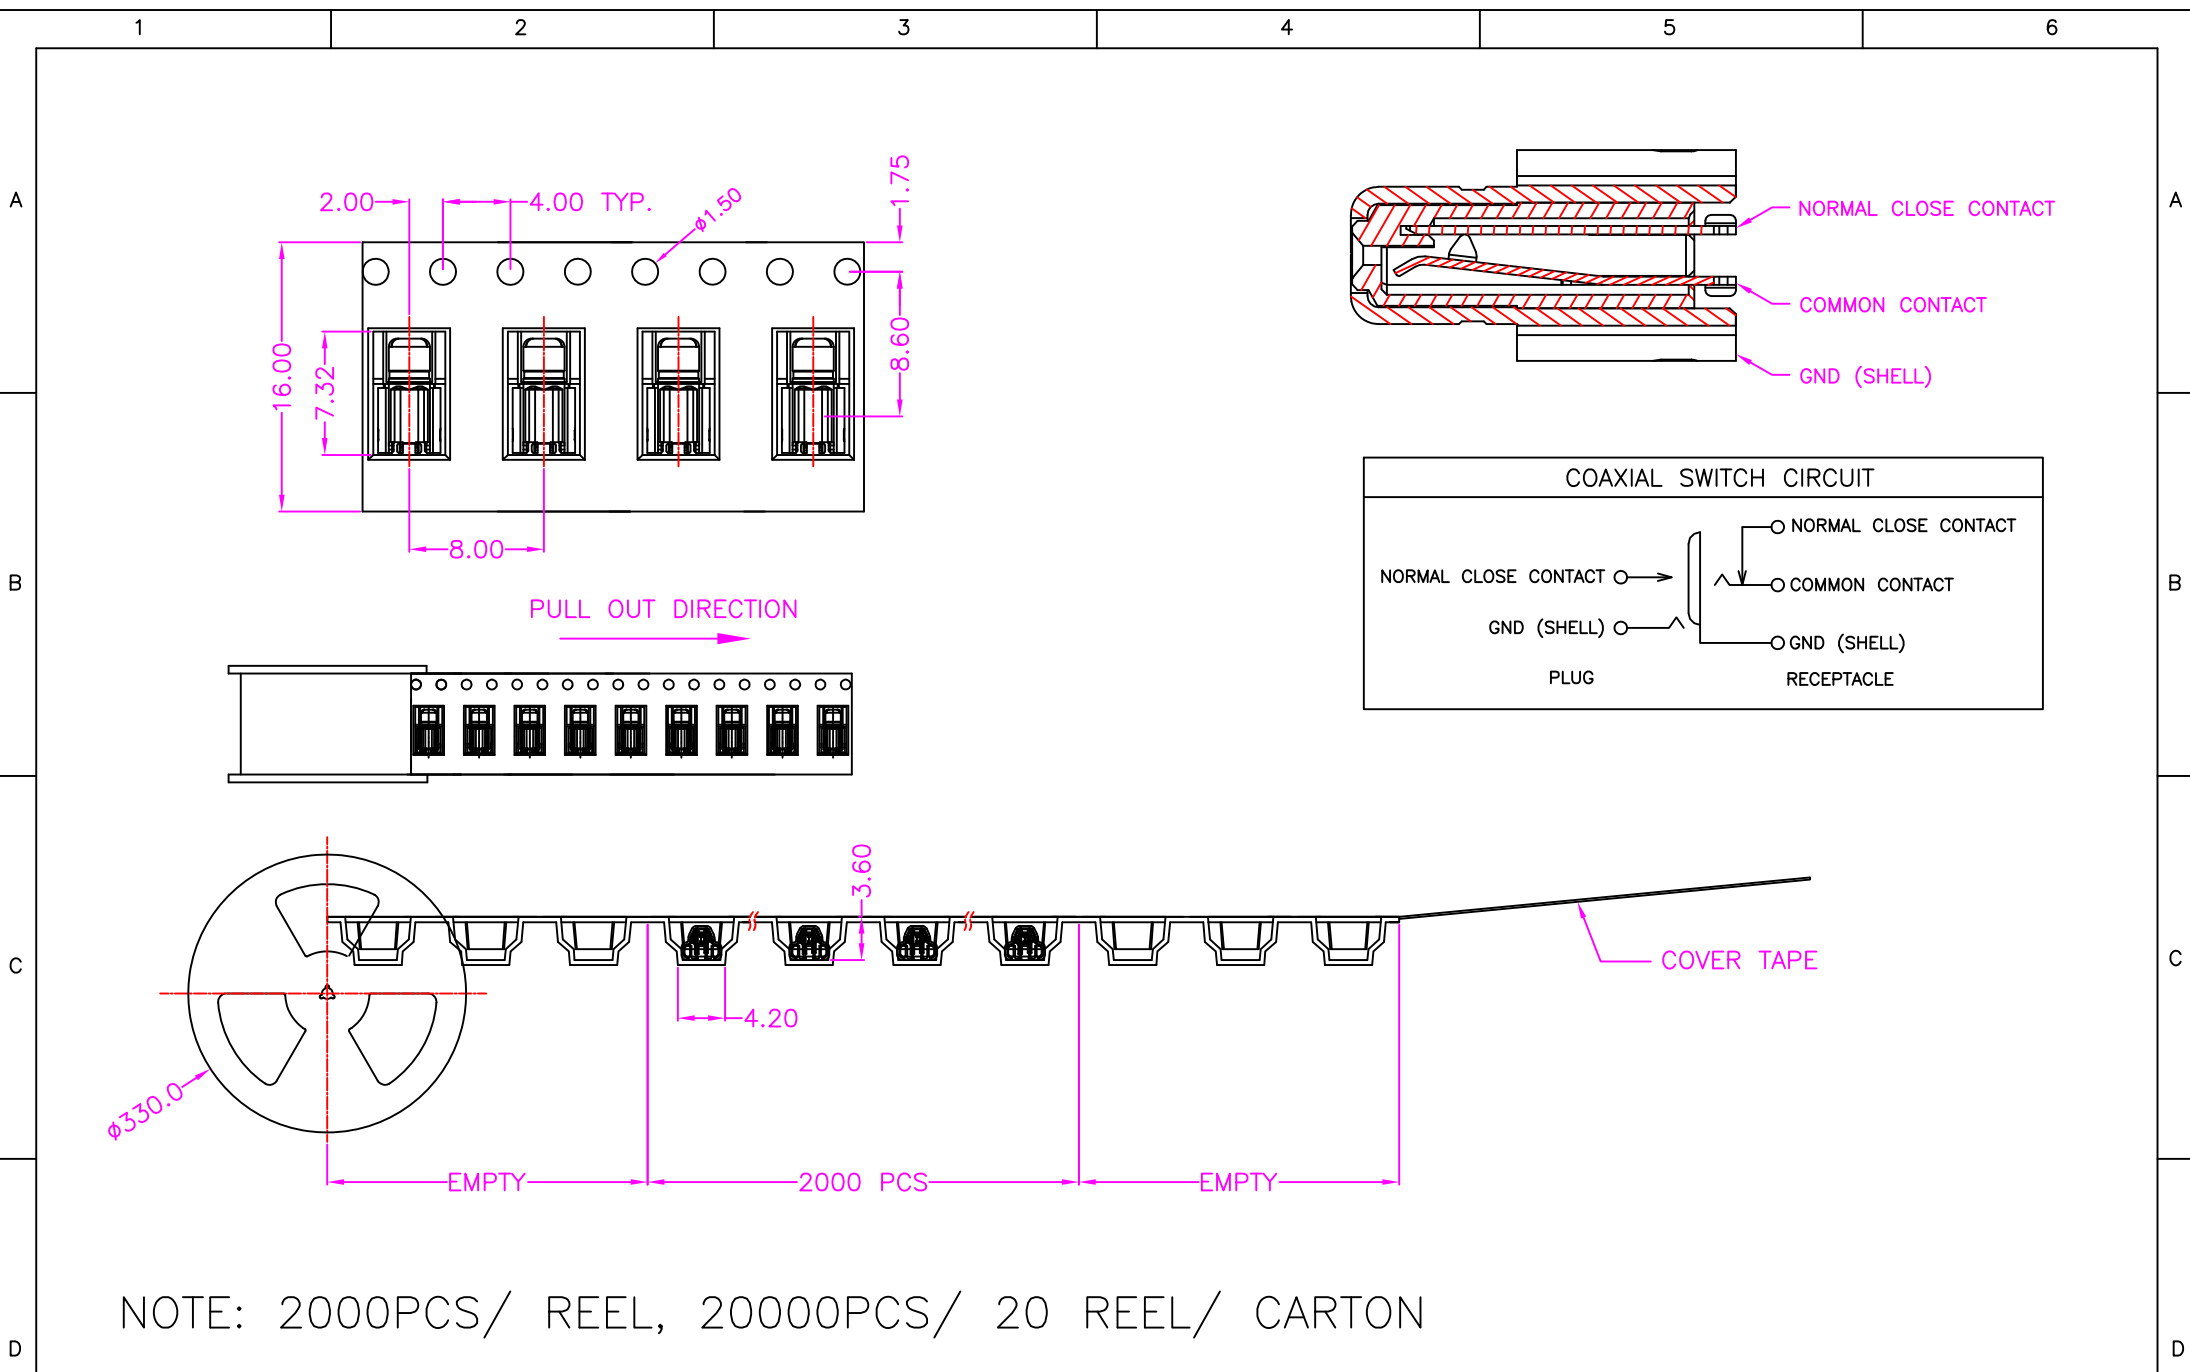

NOTE: 2000PCS/ REEL, 20000PCS/ 20 REEL/ CARTON



TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	A

DRAWN BY	Mika 2024/1/15
APPROVED BY	Lion 2024/1/15

TITLE	RF SWITCH, R/A SMT				
DRAW NO.	RRSDA-001	UNIT	MM	Sheet	2/2