

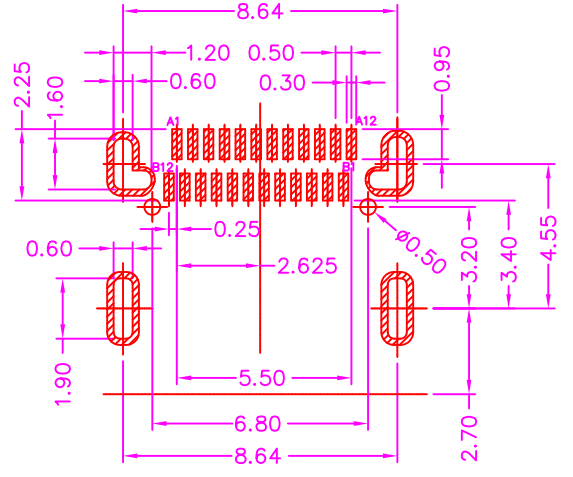
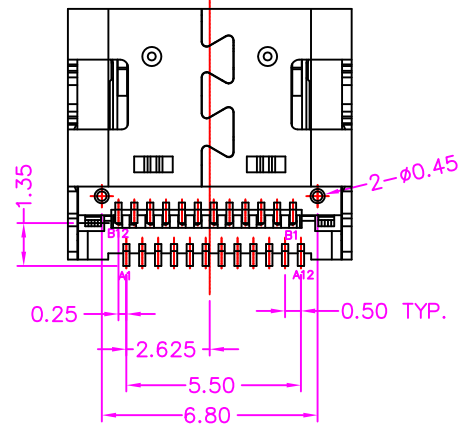
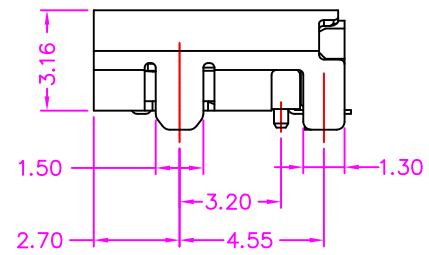


MATERIALS
 HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: SUS, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION
 CURRENT RATING:
 1.5A/PIN MAX (A4,A9,B4,B9)
 1.25A/PIN MAX (A1,A12,B1,B12)
 0.25A FOR ALL THE OTHERS CONTACTS
 DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 40m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 300V
 OPERATION TEMPERATURE: -40°C~+85°C

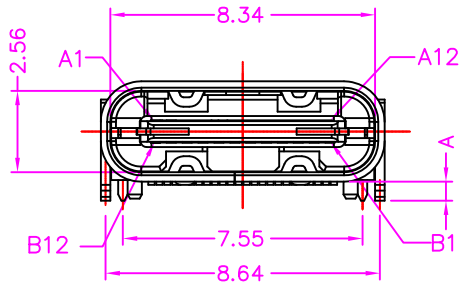

P.C.B. LAYOUT
 TOP VIEW±0.05

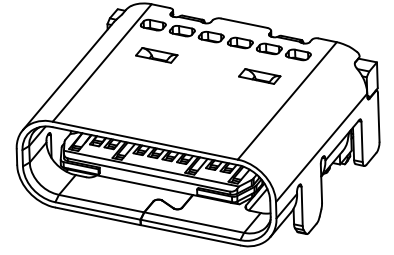

PART NUMBER:
 BUSJB - 2 4 * - 1 * F *







SERIES — NO. OF POS. — DIA. "A" OPTION
 A: 0.60mm
 B: 1.30mm

CONTACT PLATED OPTION — PACKAGE OPTION
 1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD
 1: TRAY
 2: TAPE REEL

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

B	MODIFY DRAWING	2024.1.24
A	RELEASE	2020.5.6
REV.	DESCRIPTION	DATE

ZICONN ELECTRONIC CO., LTD. WWW.ZICONN.COM 886-3-4687695	TOLERANCES	REV.	B	DRAWN BY	Zhong 2020/5/6	TITLE	USB C TYPE, PCB MOUNT, SMT, METAL SHIELD, WITH POST, 24PIN, FEMALE				
	X±0.40 .XX±0.20 .X±0.30 .XXX±0.10			APPROVED BY	Lion 2020/5/6	DRAW NO.	BUSJB-015	UNIT	MM	Sheet	1/2

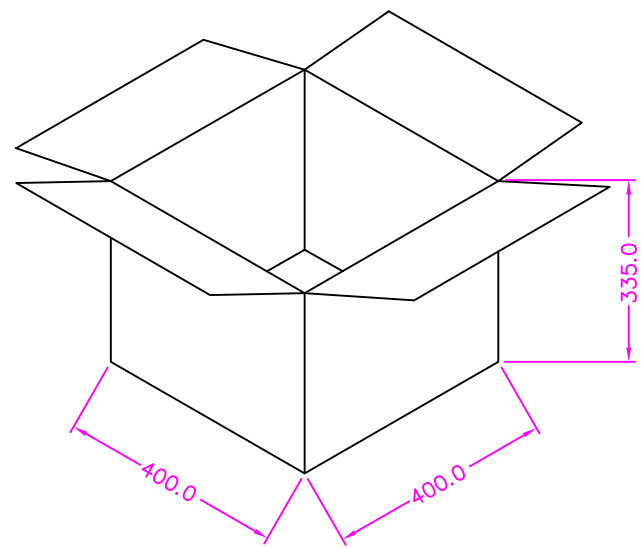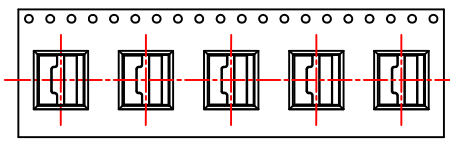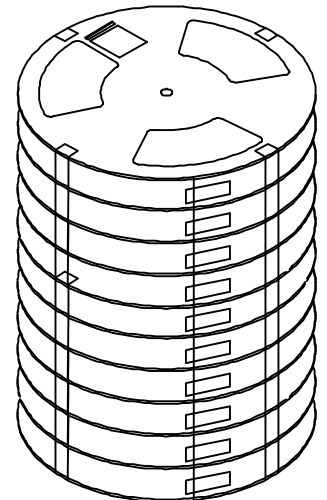

NOTE: 900PCS/REEL, 9000PCS/ 10 REEL/ CARTON

ZICONN
ELECTRONIC CO., LTD.
WWW.ZICONN.COM 886-3-4687695

TOLERANCES	
X.±0.40	.XX±0.20
.X±0.30	.XXX±0.10

REV.	B

DRAWN BY	Zhong 2020/5/6
APPROVED BY	Lion 2020/5/6

TITLE	USB C TYPE, PCB MOUNT, SMT, METAL SHIELD, WITH POST, 24PIN, FEMALE				
DRAW NO.	BUSJB-015	UNIT	MM	Sheet	2/2